


### > VT&VIT SERIES

#### 二爪及四爪中實油壓夾頭

2-JAW AND 4-JAW WEDGE TYPE  
NON THROUGH HOLE POWER CHUCK

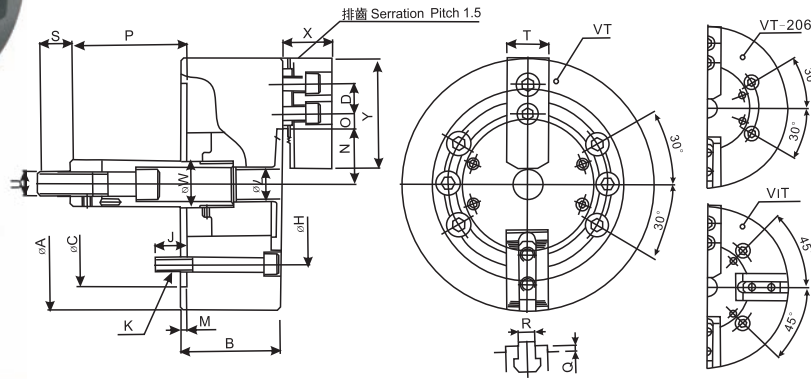

- ⊙ 1.適合特殊應用例:應用於三爪夾頭無法夾持之特殊形狀工件,如長方形、棒形或凸緣。
- ⊙ 2.可與V或VA系列互換。
- ⊙ 3.基本尺寸規格同V型夾頭。
- ⊙ 4.高性能同V型夾頭。
- ⊙ Suitable for special applications :Used to hold special shape work pieces, such as square bar or flanges which is not possible clamping by 3 jaw chuck.
- ⊙ Interchangeable with V or VA series.
- ⊙ Basic dimensions are the same as V type.
- ⊙ High performance as V type.

型式 Model	柱塞行程 Piston stroke (mm)	爪行程(直徑) Jaw stroke dia (mm)	最大拉杆推力 Max DB pull (kgf)	最大夾持力(Kgf) Max clamping force	最大使用油壓力 Max oil pressure (kgf/cm <sup>2</sup> )	最高回轉速 max r.p.m	重量 Weight (kg)	慣性矩 kg·m <sup>2</sup>	適合油壓缸 Matched cylinders	適合生爪 Matched HC	適合硬爪 Matched HJ	外徑夾持範圍 Clamping range (mm)
VT-206	20	20	20	3569	17.3	5200	12	0.045	MS105C MH100	HJ06	HC06	Ø18-Ø165
VT-208	21	21	21	5098	16.3	4500	22	0.13	MS125C MH125	HJ08	HC08	Ø28-Ø210
VT-210	25	25	25	7342	19.4	4000	33.5	0.29	MS150C MH150	HJ10	HC10	Ø24-Ø254
VT-212	30	30	30	10605	18.4	3300	58	0.7	MS150C MH150	HJ12-1	HC12-1	Ø18-Ø304
VIT-212	30	30	30	15907	27.5	2800	64	0.78	MS125C MH125	HJ12-1	HC12-1	Ø18-Ø304
VT-215	35	35	35	16927	21.7	3000	100.6	1.7	MS200C	HJ15-1	HC15-1	Ø68-Ø381
VIT-218	35	35	35	25391	32.6	2300	119	2.975	MS200C	HJ15-1	HC15-1	Ø130-Ø450
VIT-224	35	35	35	27838	32.6	1520	228	7.3	MS200C	HJ24-1	HC24-1	Ø152-Ø610
VIT-232	35	35	35	21924	32.6	920	400	30	MS200C	HJ24-1	HC32-1	Ø100-Ø810

型式 Model	A	B	C	D	H	J	K	L	M	N max	O max	O min	p max	p min	Q	R	S	T	U	W	X	Y
VT-206	165	74	140	20	104.78	14	4-M10×70	21	5	38.7	15.25	9.25	104.6	84.6	4	12	36	31	M16×2.0	34	39	73
VT-208	210	85	170	25	133.35	20	6-M12×85	25	5	46.85	22.25	11.75	132	111	5	14	36	35	M20×2.5	38	41	95
VT-210	254	89	220	30	171.45	23	6-M16×85	34	5	51.1	30.75	11.25	158	133	5	16	36	40	M20×2.5	45	46	110
VT-212	304	106	220	30	171.45	23	6-M16×105	34	6	61	48.75	12.75	163	133	5	18	36	50	M20×2.5	50	54	130
VIT-212	304	106	220	30	171.45	23	6-M16×105	34	6	61	48.75	12.75	163	133	5	18	36	50	M30×3.5	50	54	130
VT-215	381	114	300	43	235	29	6-M20×115	6	77.5	50.25	23.25	104	69	2	25.5	55	50	M30×3.5	60	63	165	
VIT-218	450	114	300	43	235	29	6-M20×115	6	108	50.25	23.25	92	57	2	25.5	55	50	M30×3.5	60	63	165	
VIT-224	610	125	380	60	330.2	31	6-M24×115	6	125	93.5	24.5	97	62	7.5	25	55	65	M30×3.5	60	76	180	
VIT-232	810	135	380	80	330.2	26	6-M24×115	6	104.9	196.5	25.5	74	39	9	25	60	74	M30×3.5	60	97	210	

\* 保留技術更改的權利, 恕不另行通知 Subject to technology changes without prior information  
 \* 非標準需求可訂做 Non-standard requirements can be made

